


QUICK Start - Operator selection in Pro Series with white SIM

Front Panel UI Web UI

Configuration per modem / SIM (3 modes)

Automatic	The operator is automatically selected in the field. <i>All SIM cards may lock on the same operator.</i>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Scan & Select	The user scan the network in the field and select the expected operator among detected networks.	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Manual	The user forces the operator (prior to field presence) with codes identifying the country (<i>Mobile Country Code</i>) and the operator (<i>Mobile Network Code</i>)	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Configuration from the front panel UI

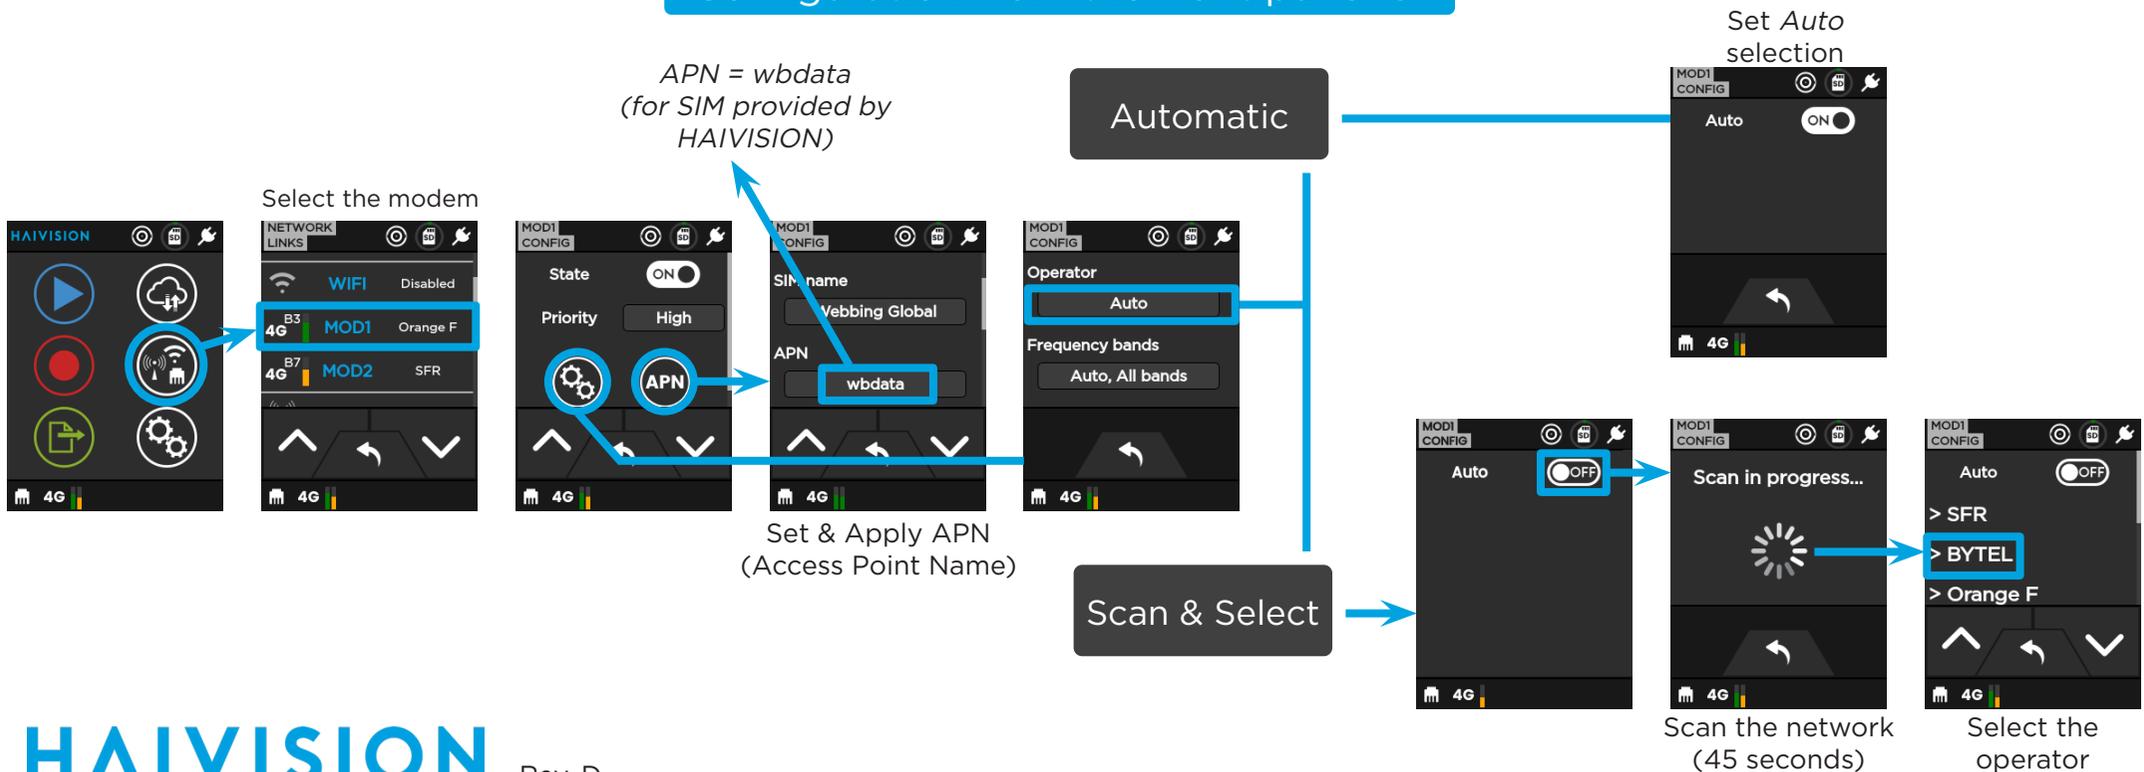

Configuration from the Web UI

Network	Status	Tx bitrate	Priority
ETH1	10.50.1.6	36.6 kbps	
ETH2	No link	0 bps	
WIFI	Disabled	0 bps	<input type="checkbox"/>
B20 4G MOD1	Orange F	0 bps	<input checked="" type="checkbox"/>

Select the modem

APN

Choose a pre-defined modem APN ▾

Name: Webbing Global

APN: wbdata

Username:

Password:

Operator

APN = wbdata
(for SIM provided by Haivision)



Operator

Selection mode: Auto

Operator

Selection mode: Scan and select

Operator: Scan in progress... Scan

Scan the network
(45 seconds)

Operator

Selection mode: Scan and select

Operator:

Name	<input type="text"/>	Scan
Orange	<input type="checkbox"/>	
BYTEL	<input checked="" type="checkbox"/>	
Free	<input type="checkbox"/>	
SFR	<input type="checkbox"/>	

Select the operator

Operator

Selection mode: Manual

Name: BYTEL

MCC: 208

MNC: 20

All country/network codes
<http://www.mcc-mnc-list.com>

Set MCC
(Mobile Country Code)
Ex: 208 for France

Set MNC
(Mobile Network Code)
Ex: 01 for Orange
10 for SFR
15 for Free
20 for Bouygues Telecom

Apply