


FROM PANEL UI


Tap **NETWORK** settings on home panel




Tap on the modem to be configured



Configure both **APN & Settings**



Set **APN** (Access Point Name)
«White» SIM cards from Haivision = **wldata**



We highly recommend that you select several operators for your device in order to spread the stream over several networks, thereby avoiding the risk of using a single network already overloaded.

Each modem/SIM can be configured in one of 3 modes:

Automatic ✓ Panel UI ✓ Web UI

The operator is automatically selected in the field. All SIM cards may lock on the same operator

✓ Panel UI ✓ Web UI


The user scans the network in the field & selects the expected operator among detected networks

Manual


✗ Panel UI ✓ Web UI

The user forces the operator (prior to field presence) with codes identifying the country (Mobile Country Code) & the operator (Mobile Network Code)



Enabling Auto Mode




Tap to toggle **Auto** configuration ON
Auto ON assigns operator automatically



Enabling Scan & Select Mode



Tap to toggle **Auto** configuration OFF.
Auto OFF starts scan of available networks




Scan may take up to several minutes



Tap to assign operator to SIM card

FROM WEB UI


1 From the **Networks** page, click the settings button for the modem to be configured

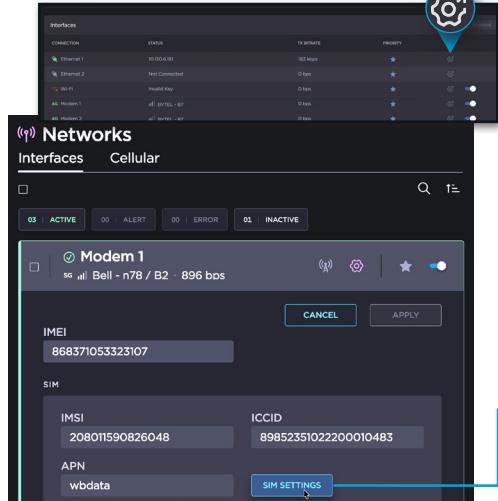

2 Select **SIM SETTINGS**



We highly recommend that you select several operators for your device in order to spread the stream over several networks, thereby avoiding the risk of using a single network already overloaded.

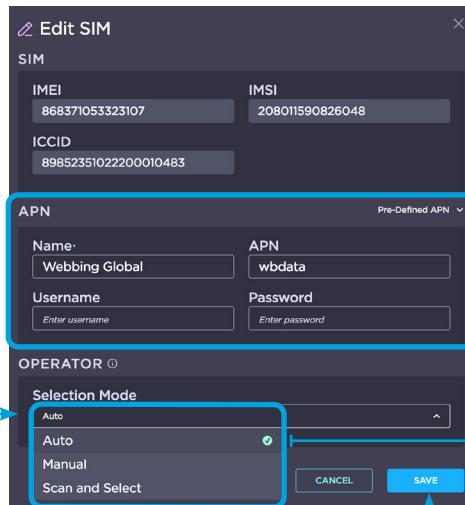

3 Set the **Operator Selection mode** & Access Point Name (APN)

For Haivision SIM cards, APN = **wbdata**

4 Click **Save** when done

Auto

The operator is automatically selected based on default settings & signal strength

OPERATOR

Selection Mode

Auto

Scan & Select

Click the SCAN button, then select from the list of available operators

OPERATOR

Selection Mode

Scan and Select

SCAN

Choose an available operator:

ROGERS Bell
 TELUS

Manual

Enter the operator **Name**, Mobile Country Code (**MCC**), & Mobile Network Code (**MNC**)

OPERATOR

Selection Mode

Manual

Name

MCC

Enter MCC

MNC

Enter MNC