

Air Series



Quick Start Guide


Document Version: v1.6

HAIVISION


Parc Edonia, Bat. X1
Rue de la Terre de Feu
35769 Saint Grégoire Cedex
France
Tel: +33 2 56 56 50 14

Front View

Indicators

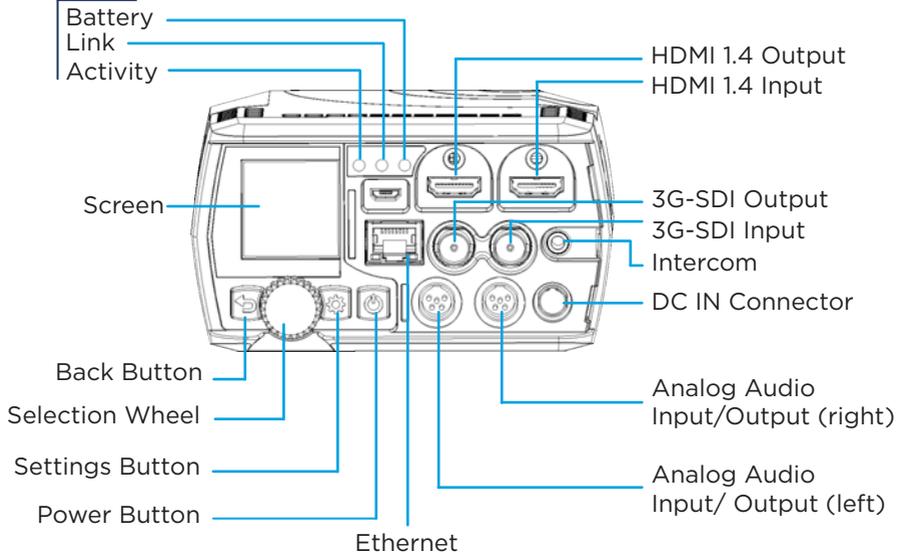


Rear View

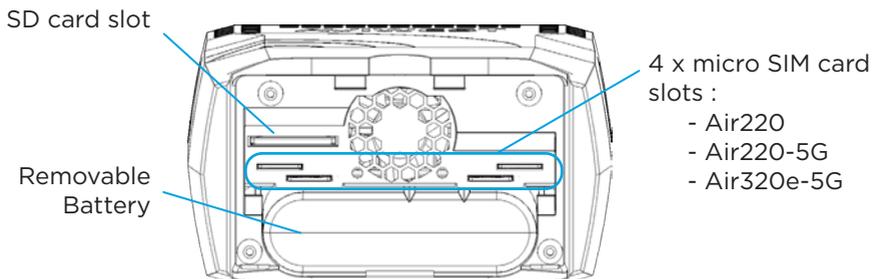


Getting ready

1. Remove the rear cover.


- 1a. Press on top.
- 1b. Remove the cover.

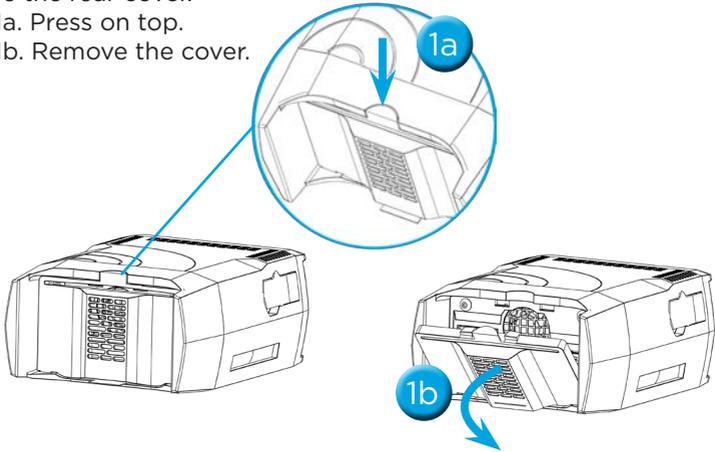


2. Insert the battery (if not already installed).

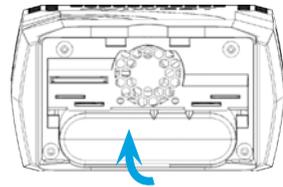


3. Connect the AC/DC adapter to the unit and connect it to the power supply.

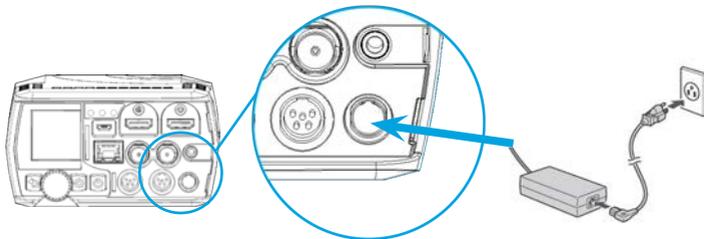


4. The battery indicator lights up in green when charging. It turns to blue when the unit battery is fully loaded.

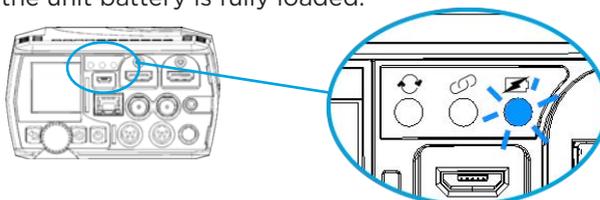

5. Insert an SD card

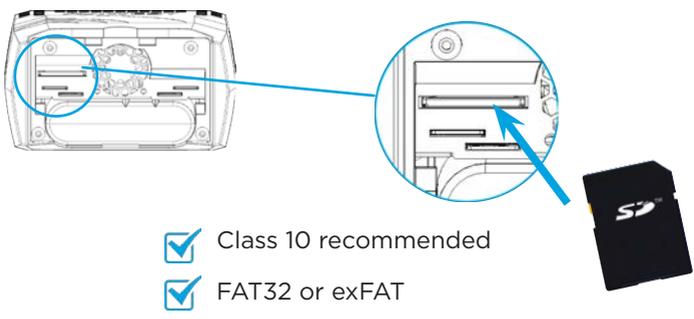


6. Insert SIM cards into slots (Air220, Air220-5G and Air320e-5G).

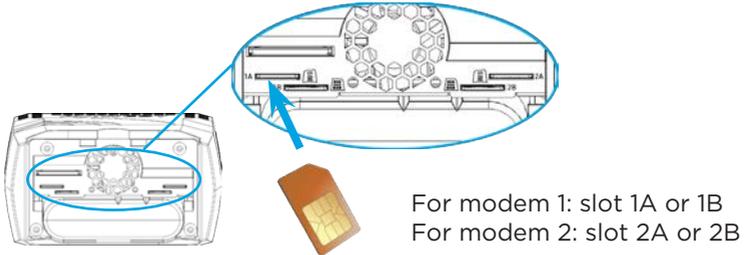


7. Place the rear cover back.

8. Connect the video input cable (either HDMI or SDI).

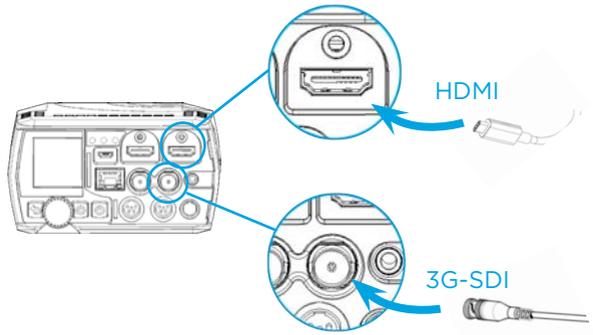

Turning on the unit

Press the power button to turn the unit on.

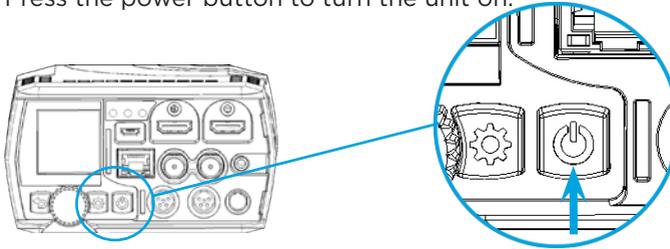

When the unit is ready, the home screen appears:



Selecting a Video Source

1. Select  and press  to confirm.

2. Select  and press  to confirm.
The default source is Auto.

3. Check that video source is Auto. If not, press 
and turn  to select Auto.



5. Press  to confirm.




Configuring a Destination Profile

1. Select  and press  to confirm.



2. Select  and press  to confirm.




3. Press  to create a new Destination Profile.

4. Press  to activate the keyboard and compose a name for the Destination Profile.




5. Select and press  to confirm.

6. Turn  to select the Type field, and press to select StreamHub as Destination Profile Type.



7. Turn  to select the Host field, and press the wheel to enter the StreamHub IP address or Host-name.



8. Turn  to select the Input field, and press the wheel to select Auto (for an Automatic Input assignment).



9. Turn  to select and enable the Auto-connect function.



10. Turn  to select  and press  to confirm.

Starting a Live

1. Select  and press  to confirm.
2. Turn  to the right to access the Live menu.
The LIVE menu displays information:



- Selected Live Profile
- Selected Record Profile
- Auto-record (ON/ OFF)
- Selected Destination Profile



3. Turn  to the left to select .
4. Press  to start the live.

Audio Levels

Live Duration



5. Turn  to the left for more information.



- Some indications are displayed:

Network Bitrate  Source Standard
 End to End Latency  Live Duration

- When Auto-record is ON, additional indications appear:

Space used on SD Card  Remaining Recording Time possible on SD card



Stopping a Live

1. Turn  to the right.
2. Press  to stop the Live.
3. Press  again to confirm stopping the Live.



Starting a Record

1. Select  and press  to confirm.
2. Turn  to access the RECORD menu.
The Record menu displays information:



- Selected Record Profile
- Auto-record (ON/ OFF)
- Selected Destination Profile



3. Turn  to the left to select .
4. Press  to start the record.
5. Turn  to the left for more information.

- Audio Levels
- Record Duration



i

- *Some indications are displayed:*
 - Amount and percentage of data already forwarded (if option enabled)
 - Network Bitrate
 - Record Duration
- *When Auto-forward is ON, additional indications appear:*
 - Space used on SD Card
 - Remaining Recording Time possible on SD card
 - Source Standard

Stopping a Record

1. Turn  to the right.
2. Press  to stop the Record.
3. Press  again to confirm stopping the Record.



Starting a Forward

1. Select  and press  to confirm.

The FORWARD menu appears:



- To forward the last record:
 - a) Turn  to select .
 - b) Press  to confirm.
- To forward the all files:
 - a) Turn  to select .
 - b) Press  to confirm.
- To forward some specific files:
 - a) Turn  to select  and press  to confirm.
 - b) Press  to display the SD card content.
 - c) Turn  and press it to select files.
 - d) Long press  to start Forward.

Stopping a Forward

1. Turn  to the right.




2. Press  to stop the Forward.

3. Press  again to confirm stopping the Forward.



Turning off the unit

Long press the power button to turn the unit off.

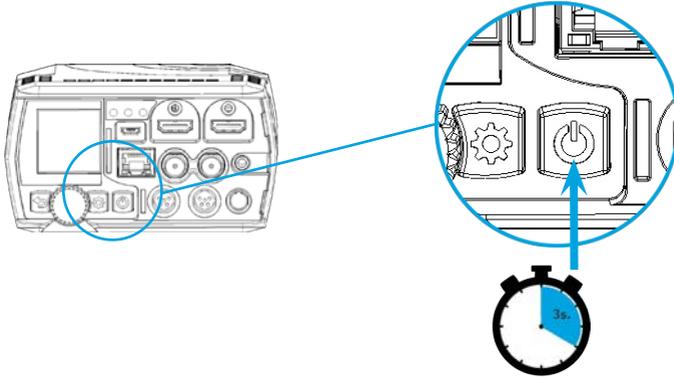

All technical documents

Find the user guide and all other technical documents on Haivision Info Center at <https://doc.haivision.com>.

